
BELLA is a stainless steel towel radiator. Available in the following finishes: Standard White Stainless Steel, Chrome-plated, Brushed Copper and Satin Nickel.



Bella, Hight 875 mm, Lenght 532 mm, Chromium

Construction features

stainless steel towel radiator
horizontal tubes 25 mm diameter
lateral manifolds 25 mm diameter
1/2" Gas right threading
maximum working pressure 15 bar
maximum working temperature 95°C

Standard equipment

2 pcs Elbow-type design valve fitting 1/2" connection thread
on the radiator's manifold
2 pcs 15 mm copper tube connection kit
2 pcs 1/2" M eccentric tube, to suit the 15 mm valve copper
connection, complete with wall cover to hide the pipe fittings
2 pcs wall bracket matching radiator's colour/finishing
1 air vent valve
1 blind plug

Certifications



Plus



Technical data

Model	Deph (mm)	Height (mm)	Width (mm)	Conn. C. (mm)	Weigth (kg)	Capacity (lt)	Δt=50°C (btu/h)	Δt=50°C (kcal/h)	Δt=50°C (Watt)	Δt=40°C (Watt)	Δt=30°C (Watt)	Δt=20°C (Watt)	Exponent
623 4 tubes	32,0	550	432	400	3,20	0,90	396,0	100,0	116,0	87,0	60,0	36,0	1,280
623 4 tubes	32,0	550	532	500	3,40	1,10	450,0	114,0	132,0	99,0	69,0	41,0	1,270
623 4 tubes	32,0	550	632	600	3,60	1,20	488,0	123,0	143,0	108,0	75,0	45,0	1,261
948 6 tubes	32,0	875	432	400	4,90	1,40	696,0	176,0	204,0	155,0	109,0	66,0	1,230
948 6 tubes	32,0	875	532	500	5,20	1,60	607,0	153,0	178,0	135,0	95,0	57,0	1,234
948 6 tubes	32,0	875	632	600	5,60	1,90	852,0	215,0	250,0	189,0	133,0	80,0	1,238
1276 8 tubes	32,0	1200	432	400	6,60	1,90	676,0	170,0	198,0	149,0	103,0	61,0	1,277
1276 8 tubes	32,0	1200	532	500	7,10	2,20	764,0	193,0	224,0	168,0	117,0	70,0	1,276
1276 8 tubes	32,0	1200	632	600	7,60	2,50	826,0	208,0	242,0	182,0	126,0	75,0	1,275

Thanks to the high performance of Irsap BELLA radiators, the ideal Δt for low temperature projects is Δt at 30°C.


For Δt differt from 50°C use the formula $Q=Q_n (\Delta t / 50)^n$.

Standard equipment

- 2 pcs Elbow-type design valve fitting 1/2” connection thread on the radiator’s manifold
- 2 pcs 15 mm copper tube connection kit
- 2 pcs 1/2” M eccentric tube, to suit the 15 mm valve copper connection, complete with wall cover to hide the pipe fittings
- 2 pcs wall bracket matching radiator's colour/finishing
- 1 air vent valve
- 1 blind plug

Colors and Finishes

FINISHES

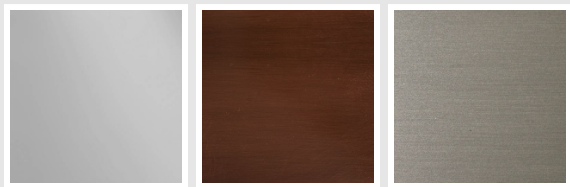

Chromium	Brushed Copper	Satin Nickel
Cod. 50	Cod. 5F	Cod. 6E

The Colors used in this folder are not considered binding. The different technological painting processes and the materials used for the realization can not have a perfect color match with the delivered product. Irsap company reserves the right to introduce at any time whatever modifications necessary to the improvement of the product.