


---

A round geometry with 1400 mm diameter completely in aluminum, dressed with a fabric of 90% natural wool and only 10% nylon. Radiator presented in sage, brick and saffron colors coupled with a white frame; avio and ash combined with an anthracite frame. ORIMONO is available in the hydraulic and electric version.

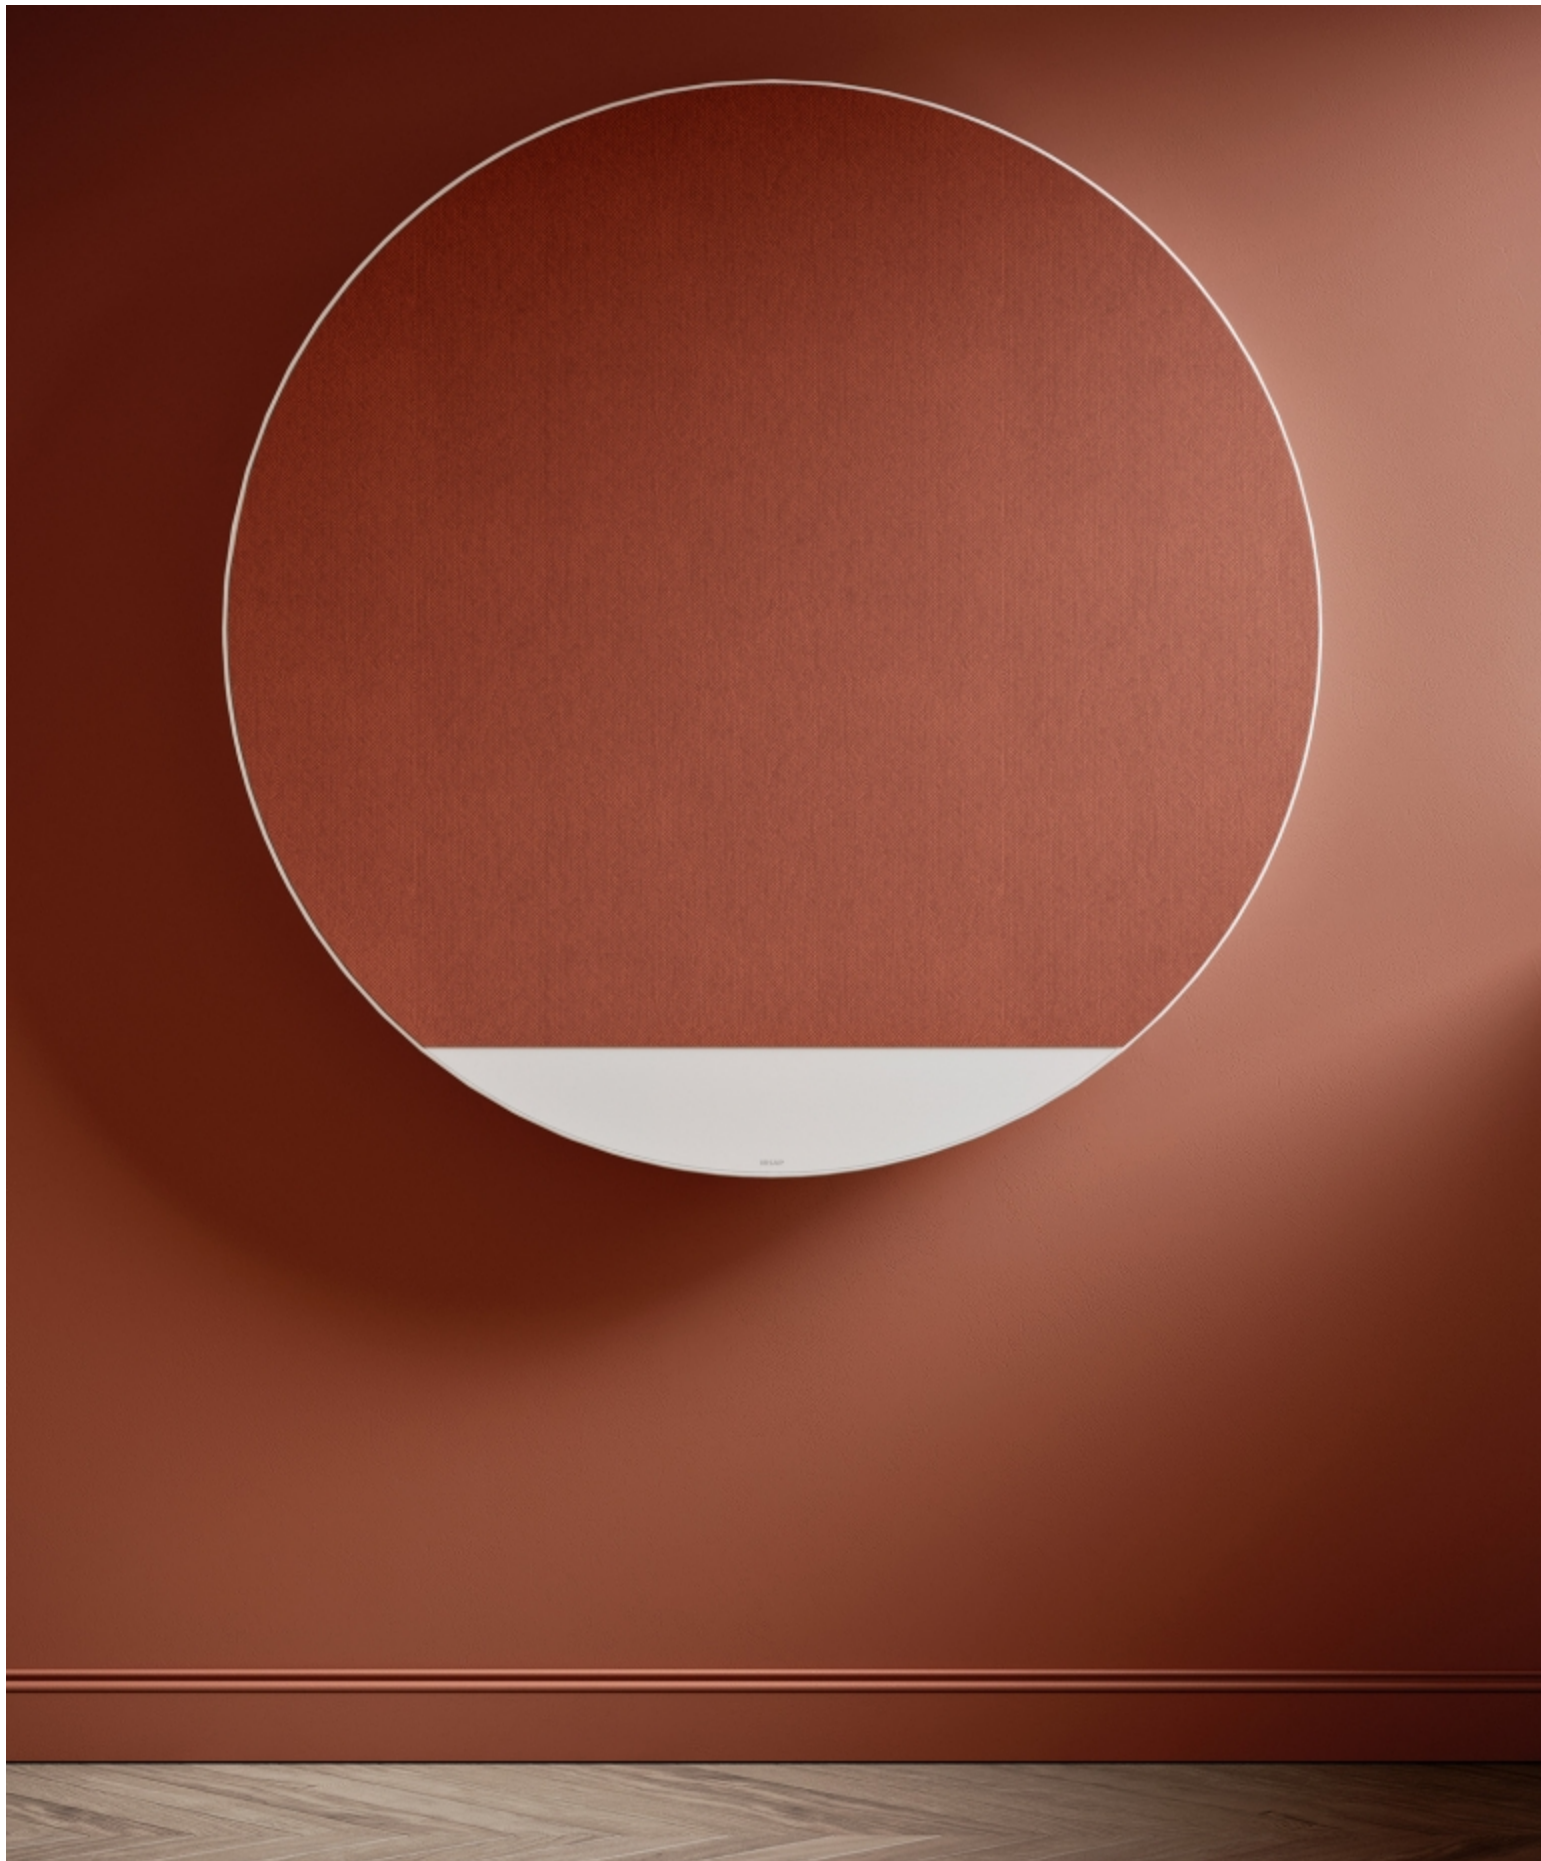

Orimono, Hight 1402 mm, Lenght 1402 mm, Brick

## **Construction features**

radiating plate

1/2" Gas right threading

maximum working pressure 4 bar

maximum working temperature 95°C

radiator with fabric finishes

## **Standard equipment**

water connection system installed on the product complete with

fittings for connection to copper pipes (12, 14 and 15 mm diameter) and multilayer pipes (14 x 2 thick and 16 x 2 thick)

system for fixing to the wall incorporated in the product  
air vent

## Certifications



## Plus



## Technical data

Model	Deph (mm)	Height (mm)	Width (mm)	Conn. C. (mm)	Weigth (kg)	Capacity (lt)	$\Delta t=50^{\circ}\text{C}$ (btu/h)	$\Delta t=50^{\circ}\text{C}$ (kcal/h)	$\Delta t=50^{\circ}\text{C}$ (Watt)	$\Delta t=40^{\circ}\text{C}$ (Watt)	$\Delta t=30^{\circ}\text{C}$ (Watt)	$\Delta t=20^{\circ}\text{C}$ (Watt)	Exponent
Orimono	101,5	1402	1402	50	49,00	1,70	2.365,0	596,0	693,0	530,0	375,0	231,0	1,200

(\*) Thanks to the high performance of Irsap ORIMONO radiators, the ideal  $\Delta t$  for low temperature projects is  $\Delta t$  at  $30^{\circ}\text{C}$ .

For  $\Delta t$  different from  $50^{\circ}\text{C}$  use the formula:  $Q=Q_n (\Delta t / 50)^n$

### Standard equipment

- water connection system installed on the product complete with fittings for connection to copper pipes (12, 14 and 15 mm diameter) and multilayer pipes (14 x 2 thick and 16 x 2 thick)
- system for fixing to the wall incorporated in the product
- air vent

# Colors and Finishes

## FINISHES

				
<b>Ash</b> Cod. 7M	<b>Avio</b> Cod. 8M	<b>Sage</b> Cod. 9M	<b>Saffron</b> Cod. 1N	<b>Brick</b> Cod. 2N

The Colors used in this folder are not considered binding. The different technological painting processes and the materials used for the realization can not have a perfect color match with the delivered product. Irsap company reserves the right to introduce at any time whatever modifications necessary to the improvement of the product.