

design Pietro Facheris

PIT towel heater has an elegant minimalist design, with two or three radiant rectangles,

overlapping each other. Space is optimized by multiplying the heat

output and rectangular sections create three different points of support for towels.


DIMENSIONS:

Width: 32/40/48/56/126 cm

Height: 60/72/99/132/176 cm

Depth: 4,1 / 7,3 cm



Depths from wall: 11 cm

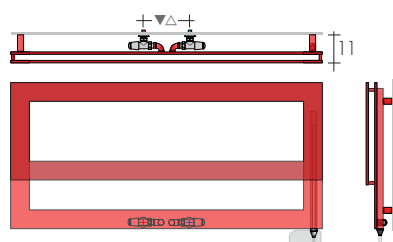


PIT 60-126




PIT 72-126




PIT 99-48




PIT 132-32



PIT 132-40



PIT 176-...



mixed version

MODEL	HxL cm	white sablé standard €	EN 442 Δt 50 K watt	Δt 30 K watt	▲▼ t.c. cm	Height H cm	Width L cm	Weight M Kg	Volume V dm³	MIXED version*(EHE cl.II) with manifold and: cable ^o €	W digital thermostat €
PIT	60-126	819,30	588	310	19	60	126	11,7	3,5	183,70	650
PIT	72-126	1002,00	900	474	19	72	126	17,8	5,5	191,00	900
PIT	99-40	570,40	369	194	19	99	40	7,7	2,3	179,90	400
PIT	99-48	617,20	403	212	19	99	48	8,3	2,5	179,90	400
PIT	132-32	812,60	567	298	19	132	32	12,3	3,7	181,80	500
PIT	132-40	840,80	613	323	19	132	40	13,2	4,0	183,70	650
PIT	132-48	869,10	660	347	19	132	48	14,0	4,2	183,70	650
PIT	176-32	938,60	750	395	19	176	32	16,0	4,8	187,90	800
PIT	176-40	966,90	796	419	19	176	40	16,9	5,1	187,90	800
PIT	176-48	995,20	843	444	19	176	48	17,8	5,3	191,00	900
PIT	176-56	1026,80	889	468	19	176	56	18,6	5,6	191,00	900

Ready in stock

Δt 40K = W Δt 50Kx0,755

^oRadio frequency chronothermostat p.227

STANDARD PRODUCTION

White "sablé" paintwork - Brackets B..

Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

PRODUCTION ON REQUEST

Paintwork to Brem color list with

colored B.. brackets

Electric version e.Pit, page 250

+15/25%

STANDARD FITTING


REG ø 1/2"

Fittings ø 3/8", on request



Special fittings, page 287



TAPPING CENTRES

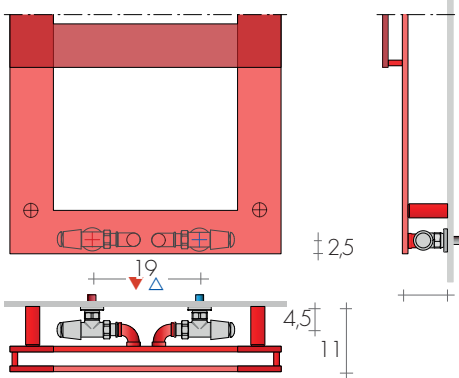

*MIXED VERSIONS vertical models
only with EG ▲▽ 5cm fittings and angled valves

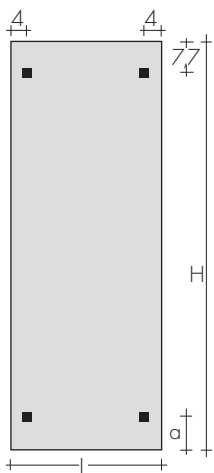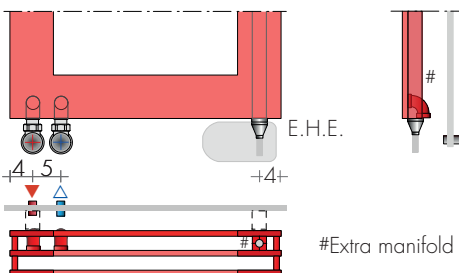

FIXINGS Brackets included

Model	a cm	brackets
PIT 60-126	7,7	B70
PIT 72-126	22	B70
PIT 99- ...	7,7	B70
PIT 132- ...	37	B35
PIT 176- ...	47	B35


RECOMMENDED VALVES

as standard at the rear of the radiator

CHROME PLATED VALVES KIT WITH:


- n°2 Valves with O-ring Tangs
- n°2 Fittings (multilayer ø16, copper ø12,14)
- n°2 Round washers

On request: Polished stainless tube cover
(to be cut to right size) Art. CA18 10,80€



REVERSE TON VALVES KIT
page 277


Art. KVR 119,20€

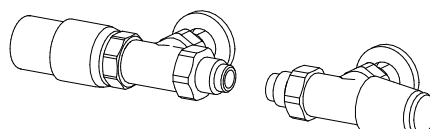

REVERSE TON VALVES KIT with
THERMOSTATIC head

Art. KTR 165,50€

REMOTE FITTINGS Art. REM 36,60€
tapping centres ▲▽ L - 6cm



2,5 ±

REMOTE VALVES ASSEMBLY KIT p. 281 with:
- n°2 Fittings (multilayer ø16, copper ø12,14)

REMOTE QUADRA VALVES ASSEMBLY KIT
Art. KQG 167,70€

REMOTE TON VALVES ASSEMBLY KIT with
THERMOSTATIC head Art. KVG 199,80€



PIT 176-40