

GEOMETRICA TONDA - OVALE

design Luigi Brembilla


Geometrica is a collection of heated towel rails with geometric elements and a distinctive horizontal bar passing through them. The towel rail bar can also be designed to extend to the left of the main radiator.

extend to the left of the main radiator.

TONDA Geo-T MODEL




*Geo-TL model
with tubes at the rear



Geo-T.. 58-56




Geo-T.. 58-87




OVALE Geo-O MODEL




*Geo-OL model
with tubes at the rear



Geo-O.. 54-89




Geo-O.. 54-116



OVALE-V Geo-OV MODEL




*Geo-OVL model
with tubes at the rear



Geo-OV.. 87-56



Geo-OV.. 87-87



MODEL	HL cm	white sablé standard €	EN 442		▲ ▼ t.c. cm	Height H cm	Width L cm	Weight M Kg	Volume V dm ³	MIXED version (EHE cl.II) with sleeve and: cable ⁹ digital thermostat		
			Δt 50 K watt	Δt 30 K watt						€	W	€
Geo-T	58-56	851,20	312	164	14	58	56	9,2	3,7	125,10	250	196,70
Geo-TL	58-56	1041,60	449	236	14	58	56	13,5	5,0	127,40	400	199,00
Geo-T	58-87	879,20	344	181	14	58	87	9,8	3,9	127,40	400	199,00
Geo-TL	58-87	1069,60	481	253	14	58	87	14,1	5,2	129,60	500	201,20
Geo-O	54-89	907,20	514	270	14	54	89	15,0	6,2	129,60	500	201,20
Geo-OL	54-89	1097,60	734	386	14	54	89	21,9	8,3	131,80	650	203,40
Geo-O	54-116	946,40	543	286	14	54	116	15,5	6,3	129,60	500	201,20
Geo-OL	54-116	1136,80	763	401	14	54	116	22,4	8,4	125,70	800	208,20
Geo-OV	87-56	1019,20	539	284	14	87	56	15,4	6,3	129,60	500	201,20
Geo-OVL	87-56	1209,60	759	399	14	87	56	22,3	8,4	125,70	800	208,20
Geo-OV	87-87	1047,20	571	300	14	87	87	16,0	6,5	131,80	650	203,40
Geo-OVL	87-87	1237,60	791	416	14	87	87	22,9	8,6	136,60	800	208,20

⁹Radio frequency chronothermostat p.227

ON REQUEST, FREE OF CHARGE, TOWEL BAR
WITH THE LEFT EXTENSION

TOWEL BAR: STANDARD COLORS

- white sablé SB 9016
- quartz grey sablé SB 7039
- jet black sablé SB 9005
- same color of radiator

- in one color of Brem color list different
from the radiator extra 36,10€

STANDARD PRODUCTION

White "sablé" paintwork - Brackets B15
Tolerance ± 3mm - Air vent ø 1/8"

MAXIMUM OPERATING PRESSURE 4 BAR

PRODUCTION ON REQUEST

Paintwork to Brem color list (colored B15
brackets) +15/25%

Electric version on request

STANDARD FITTING

Remote Fittings REM ø 1/2"


On request vertical fittings EG ø 1/2"



TAPPING CENTRES


Standard Remote fittings on the back of the panel

Model Geo-T.. Geo-OV..

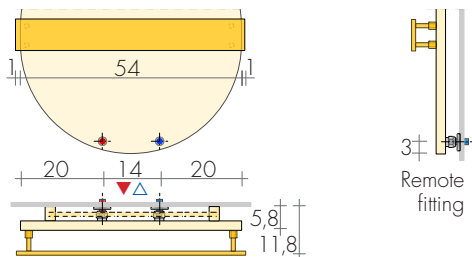

On request vertical fittings EG ▲▼ 14 cm, with sleeves and visible valves.


Model Geo-O..

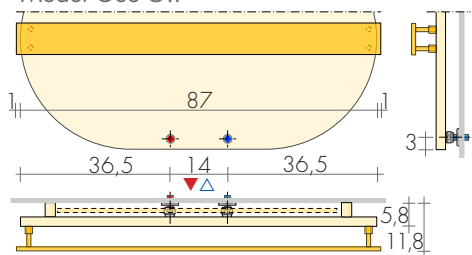

On request vertical fittings EG ▲▼ 14 cm, with sleeves and visible valves.

FIXINGS

B35 brackets included


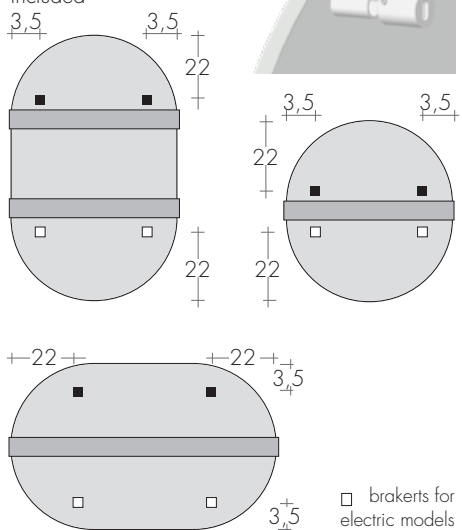


RECOMMENDED VALVES

standard remote fittings

KIT VALVOLE REMOTE COMPRENDE:

- n°2 Valves wall recessed with head chrome
- n°2 Fittings (multilayer ø16, copper ø12, 14)
- n°2 Round washer chrome-plated



REMOTE TON VALVES ASSEMBLY KIT

Art. KVG 176,60€

REMOTE TON VALVES ASSEMBLY KIT with

THERMOSTATIC head Art. KVGT 229,80€

REMOTE QUADRA VALVES ASSEMBLY KIT

Art. KQG 192,20€



REMOTE FITTINGS

