



technical data

dryer plus mixed


											Resistances Included Widerstände inbegriffen Résistances Compris Resistencias Incluida				
											Towel warmer				Fancoil
											W			W	
											300	500	750	1000	
Ref.	A	B	C	White & Colors		Chrome		Weight	Cap.						
				$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$								
	mm	mm	mm	W	W		W	W	kg	Lt					
1200 25 pipes Röhre tubes tubos	SEAIRD2M120050	1291	500	450	559	301	MIN. (close panels)	363	196	14,0	5,9	x	●		● x
					609	329	MAX. (open panels)	396	214						
1500 32 pipes	SEAIRD2M150050	1536	500	450	680	365	MIN. (close panels)	442	237	16,3	7,6		x	●	● x
					730	392	MAX. (open panels)	475	255						

kcal/h = 0,86 x Watt

● White & Color
x Chrome


Wall fastening systems

Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared





Radiator body dimensions

Größe des Heizkörpers
Dimensions du corps chauffant
Dimensiones del cuerpo calefactor



Measures in mm: A=height B=width C=interaxis
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
Mesures en mm: A=hauteur B=largeur C=entraxe
Medidas en mm: A=altura B=ancho C=entre eje

Thermostat

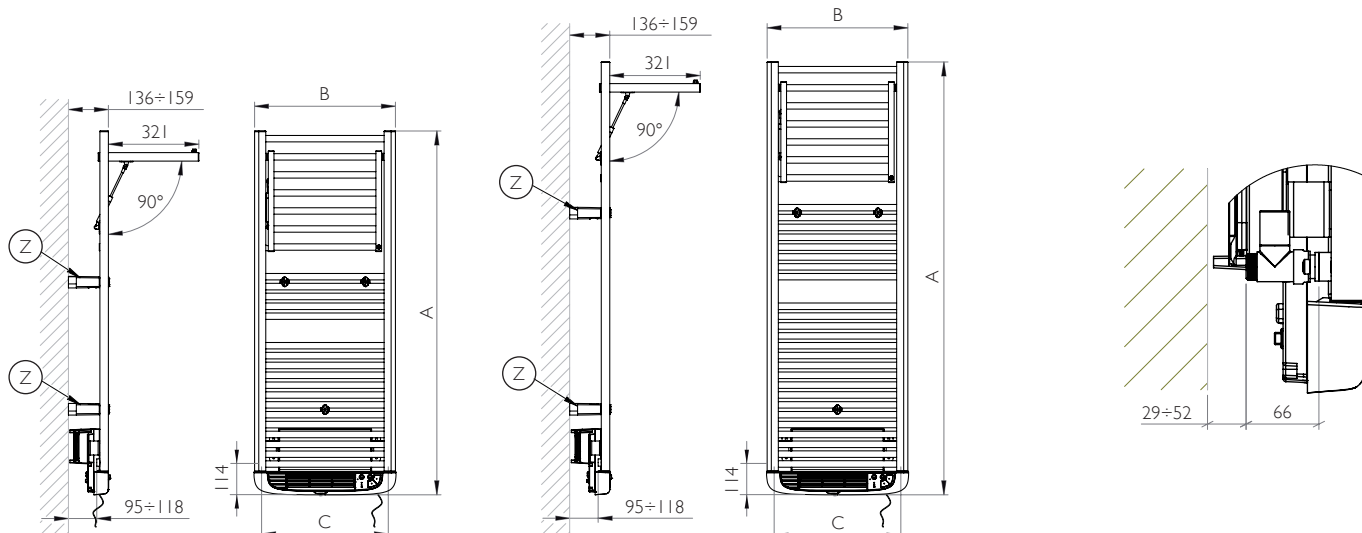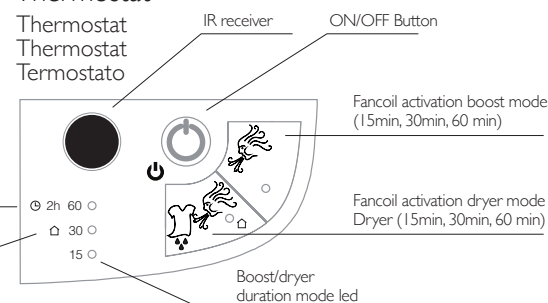

technical notes

Maximum operating temperature: 90 °C
Max. Betriebstemperatur: 90° C
Température maximum de fonctionnement: 90 °C
Temperatura máx de funcionamiento: 90 °C

Not available for single-pipe system
Für das Einrohrsystem nicht verfügbar
Non disponible pour installation mono-tube
No está disponible para instalación monotubo

Isolation Class II - IP24 Protection
Schutzklasse II - Schutzart IP24
Isolation Classe II - Protection IP24
Aislamiento Clase II - Protección IP24

Maximum operating pressure: 500 kPa
Max. Betriebsdruck: 500 kPa
Pression maximum de fonctionnement: 500 kPa
Presión máx de funcionamiento: 500 kPa

Cable length 1 mt
Kabellänge 1 mt
Longueur du câble 1 mt
Longitud del cable 1 mt

Please consult technical notes on Page 163
Lesen Sie die technischen Daten auf Seite 165
Consulter renseignements techniques détaillés à la Pag.167
Consulte las informaciones técnicas detalladas Pag.169

Steerable grid and clogged filter indicator
Bewegliches Gitter und Warnleuchte verstopftes Filters
Grille ajustable et voyant filtre obstrué
Parrilla orientable y luz filtro obturado

