



SOUL_S

height 1540 mm, lenght 550 mm. Pearl White finish (cod. 16).



Technical features:

- steel towel warmer radiator
- horizontal elements featuring rectangular 50x10 mm section tubes
- side round manifolds with a 30 mm diameter
- manifold threading 1/2" Gas right
- maximum working pressure 4 bar
- maximum working temperature 95°C
- 50 mm connection
- not suitable for installation with a single-pipe system

Prices include:


- 4 wall fixing in the same color as the radiator
- 2 1/2" hidden air vents complete with valve cover

❗ For the possibility of requesting custom models see page 590

Finishes available	Surcharge
Standard White	
IRSAP finished	
Other RAL colors	


Finishing codes see page 604.

Connection dimensions with IRSAP valves




50 mm REVERSIBLE connection

The radiator can be installed with the 50 mm headers on the left or right by simply rotating the product by 180°.






Type with collectors on the left
Hydronic connection 50 mm





Type with collectors on the right
Hydronic connection 50 mm


TYPICAL INSTALLATION FOR THE ASYMMETRIC PRODUCT RANGE USING THE THREE-WAY CONNECTOR FOR MIXED OPERATION

"A" quota for IRSAP angle pattern valves and lockshield valves = 40 mm. Cod. art. VALKROSQCUCXX

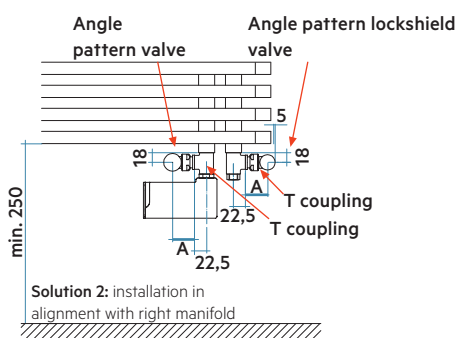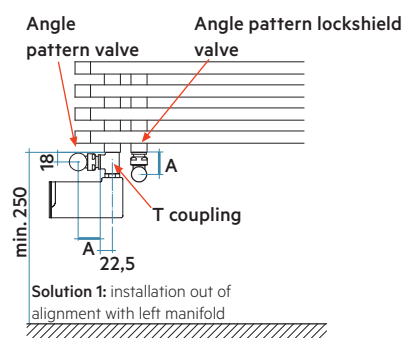

TYPICAL INSTALLATION FOR ASYMMETRIC PRODUCT RANGE USING SPACE-SAVING VALVES FOR MIXED OPERATION



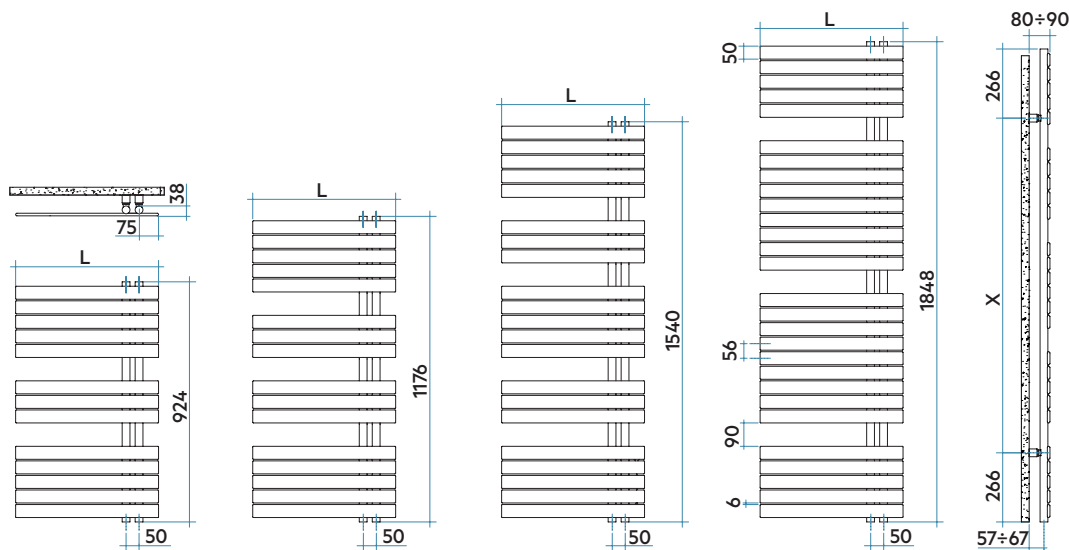

L mm	H mm	X mm
550	924	392
	1176	644
	1540	1008
	1848	1316



Model	Code	Depth mm	Height mm	Width mm	Conn. centre mm	Weight Kg	Cap. lt	Thermal Power					Exp. n.	Mix. Funct. Watt
								$\Delta t=50^{\circ}\text{C}$ Btu/h	$\Delta t=50^{\circ}\text{C}$ Watt	$\Delta t=40^{\circ}\text{C}$ Watt	$\Delta t=30^{\circ}\text{C}$ Watt (°)	$\Delta t=20^{\circ}\text{C}$ Watt		
924 13 rails 2 espaces	URP055 B 01 IR 01 NNN	38	924	550	50	9,6	3,3	1443	423	318	219	130	1,285	400
1176 16 rails 3 espaces	URS055 B 01 IR 01 NNN	38	1176	550	50	11,5	4,1	1723	505	379	262	155	1,286	400
1540 21 rails 4 espaces	URM055 B 01 IR 01 NNN	38	1540	550	50	15,0	5,3	2235	655	491	338	200	1,295	700
1848 28 rails 3 espaces	URE055 B 01 IR 01 NNN	38	1848	550	50	19,3	7,1	2812	824	615	421	247	1,313	1000

(*) Thanks to the high performance of Irsap SOUL_S radiators, the ideal Δt for low temperature projects is Δt at 30°C .

For Δt different from 50°C use the formula: $Q=Q_n (\Delta t / 50)^n$

Key Codes

Standard White colour code -
for different colour codes see the colors page

Width


Height

Packing code


Standard hydronic connection code

UR P 055 B 01 IR 01 NNN


Decorative & Technical Accessories



Kit Valves and
Lockshield valve
Pag. 564



Pipe cover kit
Pag. 568



Electronic Control
Pag. 584

