



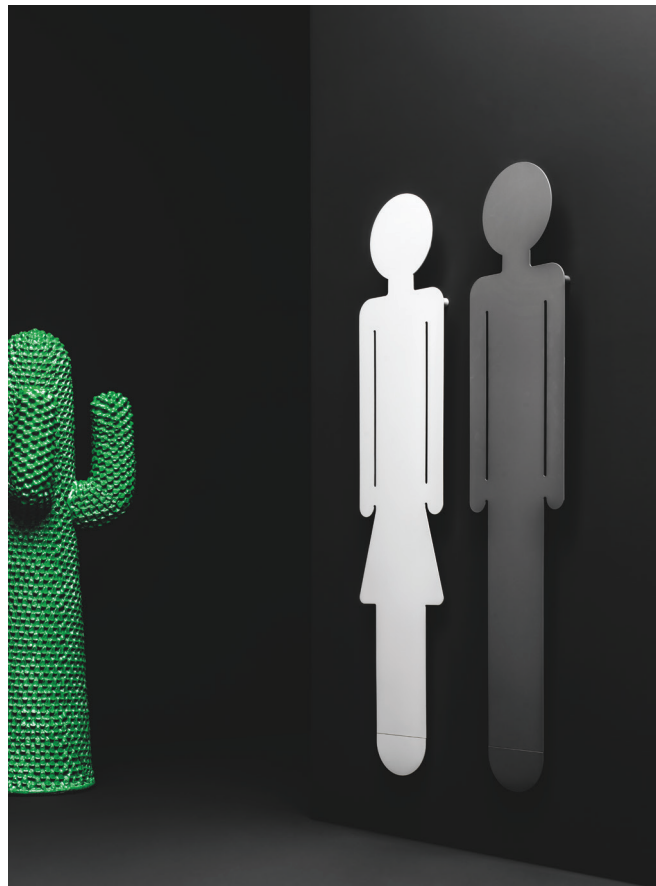

Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.241
Watt Δt 40° = Watt Δt 50° x 0.768
Watt Δt 30° = Watt Δt 50° x 0.546
Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar

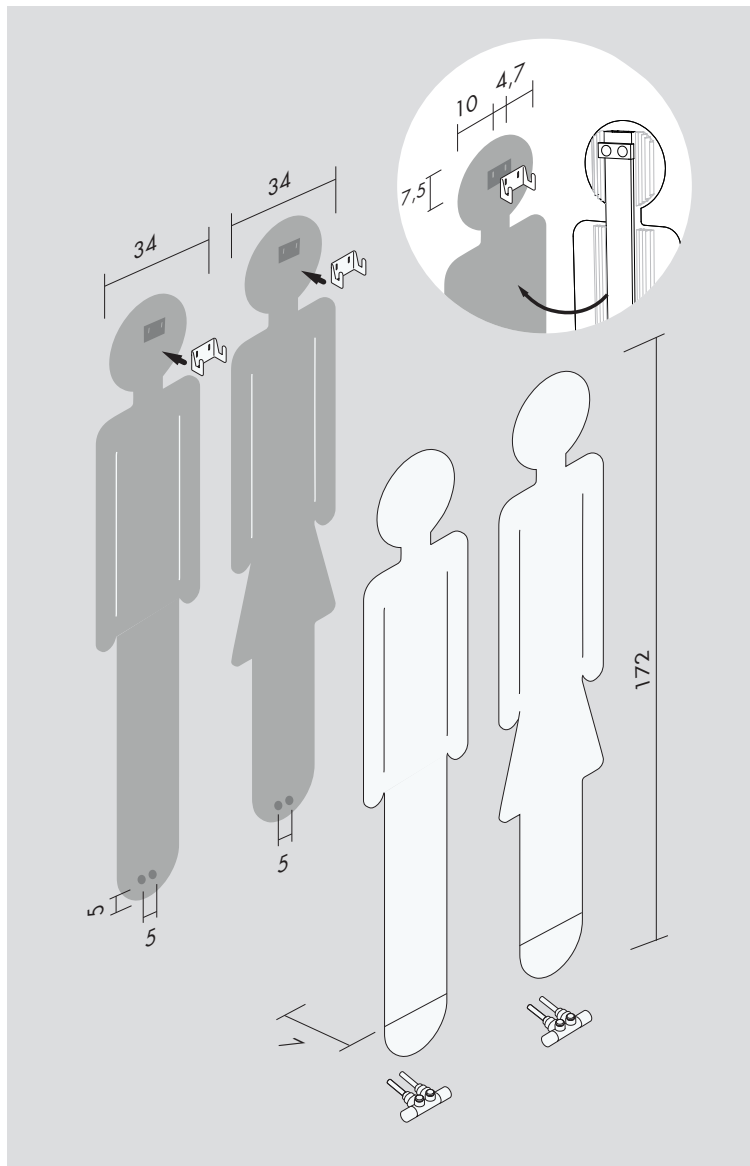

Oreste

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
172.0	34.0	5.0	OEO172001_	1.7	202	385		

Emma

H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°	• [BASIC]	• [COLOR]
172.0	34.0	5.0	OEE172001_	1.7	202	385		

[BASIC]

BCOR

NEOP

Optional



(P* = 233)

Angled valve 5 cm pipe centres
Vanne équerre entraxe 5 cm
Ventil für 5 cm Mittelanschluss
Válvula a escuadra 5 cm


[CROM] **E12SQ5R**



(P* = 234)

Thermostatic head
Tête thermostatique
Thermostatkopf
Cabezal termostático

[CROM] **TTR**



(I* = 5 cm)

Sleeving kit
Kit couvre tuyau
Rosetten
Kit cubre tubo

[CROM] **C5R**

*other colors and finishes on page / autres couleurs et finitions à la page
andere Farben und Ausführungen auf Seite / otros colores y acabados en la página:

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones

Lt* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento

P* = page / page / Seite / página