




	Ref.	B	A	C	exchanger	White & Colors		Weight	Cap.
						$\Delta t=50^{\circ}\text{C}$	$\Delta t=30^{\circ}\text{C}$		
		mm	mm	mm		W	W	kg	Lt
700 width Breite largeur anchura	ECH1070070	700	700	55	single	670	331	13,0	0,4
	ECH2070070	700	700	165	double	870	430	13,4	0,5
	ECH3070070	700	700	275	triple	960	475	13,9	0,6
900 width Breite largeur anchura	ECH2070090	900	700	165	double	1290	638	16,4	0,8
	ECH3070090	900	700	275	triple	1470	727	17,2	1,1
1100 width Breite largeur anchura	ECH2070110	1100	700	165	double	1670	826	19,8	1,0
	ECH3070110	1100	700	275	triple	1910	945	20,8	1,4
1300 width Breite largeur anchura	ECH2070130	1300	700	165	doppio	2100	1039	23,0	1,1

$$\text{kcal/h} = 0,86 \times \text{Watt}$$

Wall fastening systems



Befestigungssysteme an der Wand
Systèmes d'installation murale
Sistemas de fijación a la pared



Dimensions of the heat exchanger

Größe des Wärmetauschers
Dimensions échangeur chaleur
Medidas intercambiador de calor

Measures in mm: A=height B=width C=interaxis
Abmessungen in mm: A=Höhe B=Breite C=Achsabstand
Mesures en mm: A=hauteur B=largeur C=entraxe
Medidas en mm: A=altura B=ancho C=entre eje

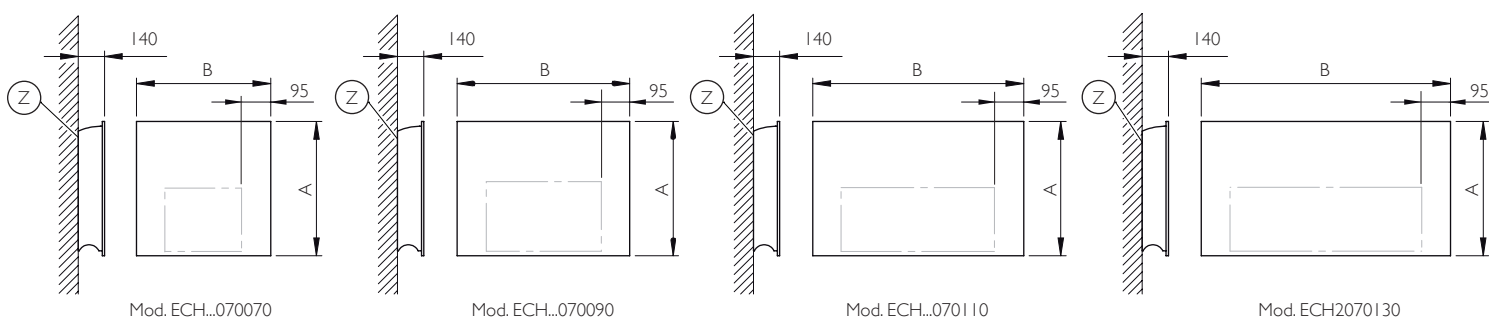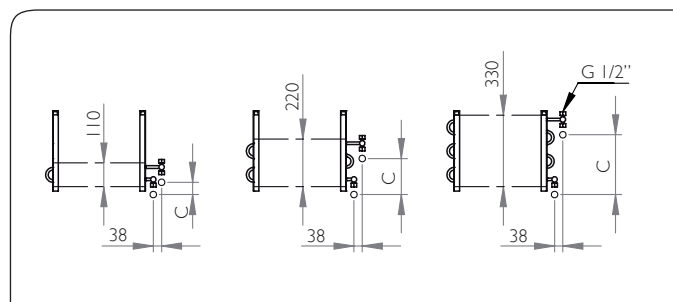

technical notes

Maximum operating temperature: 90 °C
Max. Betriebstemperatur: 90°C
Température maximum de fonctionnement: 90°C
Temperatura máx de funcionamiento: 90°C

Ground clearance: 100mm (130mm recommended)
Min. Bodendistanz: 100mm (geraten 130mm)
Distance min. du sol: 100mm (conseillé 130mm)
Distancia mínima desde el suelo: 100 mm (aconsejada 130 mm)

Minimum height distance (niche): 100mm
Min. Oberdistanz (Nische): 100mm
Distance min. supérieure (niche): 100mm
Distancia mínima superior (nicho): 100 mm

Maximum operating pressure: 800 kPa
Max. Betriebsdruck: 800 kPa
Pression maximum de fonctionnement: 800 kPa
Presión máx de funcionamiento: 800 kPa

