
Steel towel warmer radiator with rectangular tube elements, QUADRÉ comes from a contemporary appeal to the style of tradition. A radiator that, thanks to the particular rectangular frame, contains all the technical and formal characteristics of the bathroom radiator.



Quadre, Hight 1517 mm, Lenght 580 mm, Matt White

Construction features

steel towel warmer radiator with rectangular elements tubes
side manifolds with 30x30 mm section
horizontal tubes with rectangular section 25x20 mm
manifold threading and central connections (50 mm) 1/2" Gas right
maximum working pressure 4 bar
maximum working temperature 95°C

Standard equipment

4 wall fixing in the same color as the radiator
1/2" air vent

Certifications



Plus



Technical data

Model	Deph (mm)	Height (mm)	Width (mm)	Conn. C- (mm)	Weigth (kg)	Capacity (lt)	$\Delta t=50^{\circ}C$ (btu/h)	$\Delta t=50^{\circ}C$ (kcal/h)	$\Delta t=50^{\circ}C$ (Watt)	$\Delta t=40^{\circ}C$ (Watt)	$\Delta t=30^{\circ}C$ (Watt)	$\Delta t=20^{\circ}C$ (Watt)	Exponent	mixed oper. (Watt)
01														
872 18 rails 1 espace	30,0	872	430	400	7,70	4,00	1.270,0	320,0	372,0	283,0	199,0	121,0	1,224	300
872 18 rails 1 espace	30,0	872	480	450	8,40	4,40	1.404,0	354,0	412,0	313,0	220,0	134,0	1,224	400
872 18 rails 1 espace	30,0	872	530	500	9,00	4,80	1.544,0	389,0	453,0	344,0	242,0	147,0	1,225	400
872 18 rails 1 espace	30,0	872	580	550	9,70	5,10	1.682,0	424,0	493,0	375,0	264,0	160,0	1,226	400
872 18 rails 1 espace	30,0	872	730	700	11,60	6,20	2.086,0	526,0	611,0	465,0	327,0	199,0	1,227	400
1216 24 rails 2 espaces	30,0	1216	430	400	10,40	5,30	1.731,0	436,0	507,0	386,0	271,0	165,0	1,227	400
1216 24 rails 2 espaces	30,0	1216	480	450	11,20	5,80	1.913,0	482,0	561,0	426,0	300,0	182,0	1,227	400
1216 24 rails 2 espaces	30,0	1216	530	500	12,10	6,20	2.092,0	527,0	613,0	466,0	328,0	199,0	1,226	400
1216 24 rails 2 espaces	30,0	1216	580	550	13,00	6,70	2.276,0	574,0	667,0	507,0	357,0	217,0	1,226	400
1216 24 rails 2 espaces	30,0	1216	730	700	15,60	8,20	2.803,0	706,0	821,0	625,0	440,0	268,0	1,224	700
1517 29 rails 3 espaces	30,0	1517	430	400	12,70	6,40	2.226,0	561,0	652,0	496,0	348,0	212,0	1,229	400
1517 29 rails 3 espaces	30,0	1517	480	450	13,70	7,00	2.546,0	642,0	746,0	567,0	398,0	242,0	1,229	700
1517 29 rails 3 espaces	30,0	1517	530	500	14,80	7,60	2.549,0	642,0	747,0	568,0	399,0	242,0	1,229	700

1517 29 rails 3 espaces	30,0	1517	580	550	15,90	8,20	2.771,0	698,0	812,0	617,0	433,0	263,0	1,229	700
1517 29 rails 3 espaces	30,0	1517	730	700	19,00	9,90	3.585,0	904,0	1.051,0	798,0	561,0	340,0	1,230	1000
1818 36 rails 3 espaces	30,0	1818	430	400	15,60	8,30	2.732,0	689,0	801,0	609,0	428,0	260,0	1,229	700
1818 36 rails 3 espaces	30,0	1818	480	450	16,90	9,00	2.847,0	718,0	834,0	634,0	445,0	270,0	1,230	700
1818 36 rails 3 espaces	30,0	1818	530	500	18,20	9,80	3.112,0	784,0	912,0	693,0	487,0	295,0	1,230	700
1818 36 rails 3 espaces	30,0	1818	580	550	19,50	10,50	3.386,0	853,0	992,0	754,0	529,0	321,0	1,231	700
1818 36 rails 3 espaces	30,0	1818	730	700	23,40	12,70	4.170,0	1.051,0	1.222,0	928,0	651,0	394,0	1,234	1000
05														
872 18 rails 1 espace	30,0	872	430	400	7,70	4,00	1.270,0	320,0	372,0	283,0	199,0	121,0	1,224	300
872 18 rails 1 espace	30,0	872	480	450	8,40	4,40	1.404,0	354,0	412,0	313,0	220,0	134,0	1,224	400
872 18 rails 1 espace	30,0	872	530	500	9,00	4,80	1.544,0	389,0	453,0	344,0	242,0	147,0	1,225	400
872 18 rails 1 espace	30,0	872	580	550	9,70	5,10	1.682,0	424,0	493,0	375,0	264,0	160,0	1,226	400
872 18 rails 1 espace	30,0	872	730	700	11,60	6,20	2.086,0	526,0	611,0	465,0	327,0	199,0	1,227	400
1216 24 rails 2 espaces	30,0	1216	430	400	10,40	5,30	1.731,0	436,0	507,0	386,0	271,0	165,0	1,227	400
1216 24 rails 2 espaces	30,0	1216	480	450	11,20	5,80	1.913,0	482,0	561,0	426,0	300,0	182,0	1,227	400
1216 24 rails 2 espaces	30,0	1216	530	500	12,10	6,20	2.092,0	527,0	613,0	466,0	328,0	199,0	1,226	400
1216 24 rails 2 espaces	30,0	1216	580	550	13,00	6,70	2.276,0	574,0	667,0	507,0	357,0	217,0	1,226	400
1216 24 rails 2 espaces	30,0	1216	730	700	15,60	8,20	2.803,0	706,0	821,0	625,0	440,0	268,0	1,224	700

1517 29 rails 3 espaces	30,0	1517	430	400	12,70	6,40	2.226,0	561,0	652,0	496,0	348,0	212,0	1,229	400
1517 29 rails 3 espaces	30,0	1517	480	450	13,70	7,00	2.546,0	642,0	746,0	567,0	398,0	242,0	1,229	700
1517 29 rails 3 espaces	30,0	1517	530	500	14,80	7,60	2.549,0	642,0	747,0	568,0	399,0	242,0	1,229	700
1517 29 rails 3 espaces	30,0	1517	580	550	15,90	8,20	2.771,0	698,0	812,0	617,0	433,0	263,0	1,229	700
1517 29 rails 3 espaces	30,0	1517	730	700	19,00	9,90	3.585,0	904,0	1.051,0	798,0	561,0	340,0	1,230	1000
1818 36 rails 3 espaces	30,0	1818	430	400	15,60	8,30	2.732,0	689,0	801,0	609,0	428,0	260,0	1,229	700
1818 36 rails 3 espaces	30,0	1818	480	450	16,90	9,00	2.847,0	718,0	834,0	634,0	445,0	270,0	1,230	700
1818 36 rails 3 espaces	30,0	1818	530	500	18,20	9,80	3.112,0	784,0	912,0	693,0	487,0	295,0	1,230	700
1818 36 rails 3 espaces	30,0	1818	580	550	19,50	10,50	3.386,0	853,0	992,0	754,0	529,0	321,0	1,231	700
1818 36 rails 3 espaces	30,0	1818	730	700	23,40	12,70	4.170,0	1.051,0	1.222,0	928,0	651,0	394,0	1,234	1000

(*) Thanks to the high performance of Irsap QUADRÉ radiators, the ideal Δt for low temperature projects is Δt at 30°C.


For Δt different from 50°C use the formula: Q=Qn (Δt / 50)n

Standard equipment

- 4 wall fixing in the same color as the radiator
- 1/2" air vent


Colors and Finishes

STANDARD



Standard White
Cod. 01

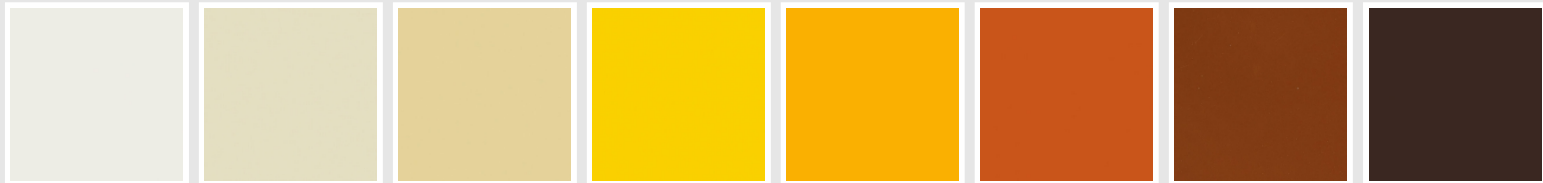
CLASSIC



Edelweiss White Cod. 34	Ivory - RAL 1013 Cod. 02	Beige Cream Cod. 26	Yellow - RAL 1021 Cod. 04	Melon Yellow - RAL 1028 Cod. E7	Orange - RAL 2004 Cod. 17	Brown Rust - RAL 8004 Cod. E1	Brown - RAL 8017 Cod. 09
----------------------------	-----------------------------	------------------------	------------------------------	------------------------------------	------------------------------	----------------------------------	-----------------------------



Claret - RAL 3003 Cod. 06	Red - RAL 3000 Cod. 05	Strawberry Red - RAL 3018 Cod. Y3	Pink - RAL 3015 Cod. R2	Bluish Lilac - RAL 4005 Cod. R3	Purple Traffic - RAL 4006 Cod. R6	Woodland Green - RAL 6005 Cod. 19	Green Grass - RAL 6018 Cod. N3
------------------------------	---------------------------	--------------------------------------	----------------------------	------------------------------------	--------------------------------------	--------------------------------------	-----------------------------------








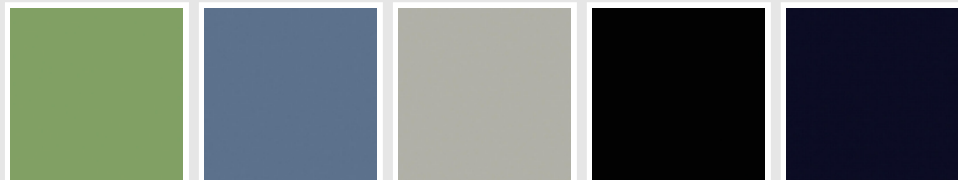


Sage Green - RAL 6021 Cod. E6	Pastel Blue - RAL 5024 Cod. G7	Manhattan Grey Cod. 03	Black - RAL 9005 Cod. 10	Deep Blue Cod. 2F
----------------------------------	-----------------------------------	---------------------------	-----------------------------	----------------------

SPECIAL



Pearl White Cod. 16	Quartz 1 Cod. 1C	Sablé Cod. Y4	Quartz 2 Cod. 2C	Sunstone Cod. 2D	Tobacco Brown Cod. 1B	Flame Red Cod. 7D	Purple Blue Cod. 1D
------------------------	---------------------	------------------	---------------------	---------------------	--------------------------	----------------------	------------------------

							
Azurite 3 Cod. 6C	Medium Grey Cod. 4D	Titanium Grey Metallic - RAL 9023 Cod. L3	Pearl Grey Cod. L6	Graphite Black Cod. 18	Quartz Grey Cod. 31	Satin Black Cod. 30	Matt White Cod. J8
							
Matt Black Cod. K1	Agave Cod. 9N	North Sea Blue Cod. 1P	Ice Cod. 3P	Matt Blue Dove - RAL 5014 Cod. 4P	Matt Light Grey Cod. 8N	Ash Grey - Ral 7021 Cod. G1	Hammered Grey Metallic Cod. 32
							
Hammered Copper Cod. J4							

RAL



Other RAL Colours (following feasibility study)
Cod. ALTRIRAL

The Colors used in this folder are not considered binding. The different technological painting processes and the materials used for the realization can not have a perfect color match with the delivered product. Irsap company reserves the right to introduce at any time whatever modifications necessary to the improvement of the product.